

10/597279  
2/25/09

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number  
WO 2005/069722 A3

(51) International Patent Classification<sup>7</sup>: E06B 1/60

(21) International Application Number:  
PCT/GB2004/000204

(22) International Filing Date: 20 January 2004 (20.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: EAGLE, Timothy, Olof [GB/GB]; 10 Kings  
Avenue, Sudbury, Middlesex TW16 7QE (GB).

(74) Agents: WILLIAMS, Powell et al.; Morley House, 26-30  
Holborn Viaduct, London EC1A 2BP (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

[Continued on next page]

(54) Title: SHIM

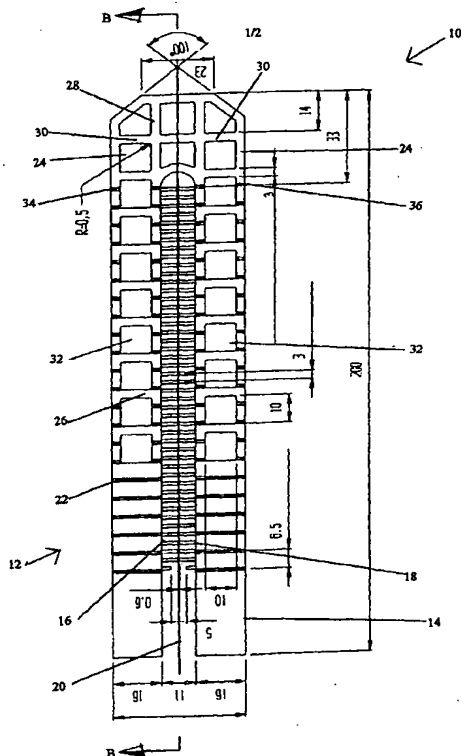

(57) Abstract: A shim (10) for use in the building industry is formed of first and second wedge elements (12, 14) which are substantially parallel to one another and are of an elongate configuration. Each wedge element (12, 14) is provided with retaining means along one longitudinal side thereof, which take the form of a line of teeth (16, 18). These teeth (16, 18) have the purpose of holding between adjacent teeth a nail or screw which would keep the shim (10) in position. The two wedge elements (12, 14) are coupled together by a coupling element (40) at the thick end of the shim (10). The coupling between the element (40) and the wedge elements (12, 14) is such that the elements (12, 14) act in a unitary manner, substantially as would a shim formed by a single wedge element. The break lines (34, 36) at the top of the wedge elements (12, 14) enable the user to detach the wedge elements (12, 14) from the coupling element (40) so that they can be used separately. This can be useful when a shim of smaller dimensions is required.

WO 2005/069722 A3



(88) Date of publication of the international search report:  
15 September 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*